


Road Blocker | Rising Bollard | Tyre killer

Anti-terrorist Road Blocker(Hydraulic)

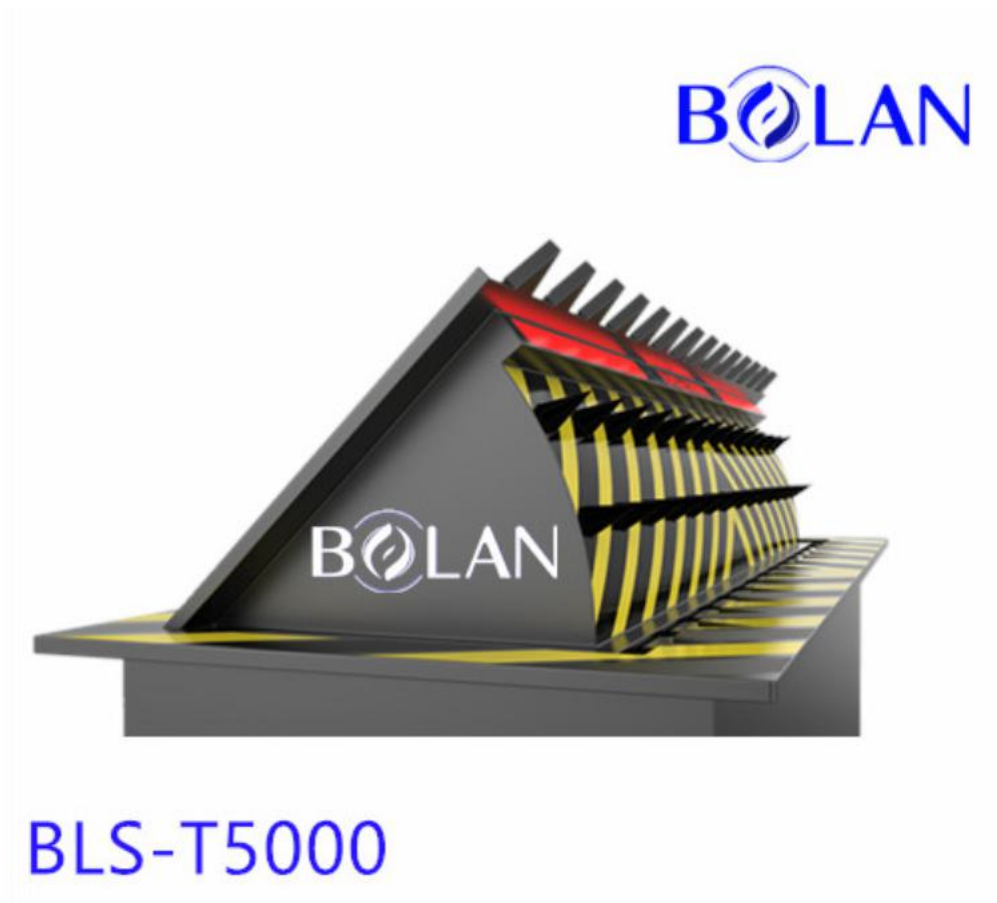

- 1、System : Hydraulic
- 2、Passing pressure: Can pass 120 tons of container trucks

-
- 3、Voltage : 3pahses 380 (Control voltage 24V)。
 - 4、System Dynamic power (w): 3.75KW。
 - 5、Rising time : $\leq 1-3S$ (Adjustable)。
 - 6、Lowering time : $\leq 1-3S$ (Adjustable)。
 - 7、Working Temperature : $-35^{\circ}C \sim 75^{\circ}C$ (suitable)。
 - 8、Material thickness: 16MM,20MM,25MM(Optional)
 - 9、Material: A3 , Spray anti-rust paint 。
 - 10、Color: Various
 - 11、Weight:1.5T
 - 12、IP rate: IP68
 - 13、The roadblock has a buffer function
 - 14、Buffer time: 0.2-0.5
 - 15、LED light with red,blue,green,yellow,purple,white color , and there is anti-terrorist sign
 - 17、Gang-control interface
 - 18、In case of a power outage, the roadblocks can be manually raised and lowered。
 - 19、Reliable structure, heavy duty load, smooth action, low noise.
 - 20、Remote control distance : 50-100m (According to the environment)

- 22、 In rising and falling, reversible operation is available .
- 23、 Device running noise ≤ 60 decibel
- 24、 The hydraulic cylinder is double sealed to ensure a waterproof rating
- 25、 Hydraulic drive comes with hydraulic lock
- 26、 Welding cylinder
- 27、 PLC programming command control system
- 28、 Control solenoid valve 24V
- 29、 Lifting solenoid valve 24V
- 30、 The control box displays text adjustable (Up, Down, Action, Time control adjustment)
- 31、 Text display with Chinese and English bilingual
- 32、 PLC built-in encryption system
- 33、 Text display LCD display, Chinese menu, precision start time setting
- 34、 Heavy duty hydraulic cylinders : HOB63-200CA+I Stroke200 Heavy duty Industrial Level
- 35、 Double dynamic double oil pump 2.3ML/time
- 36、 Oil container: 60 liter
- 37、 Hydraulic oil hose: PT international interface , 1/2 Double wire high pressure hose

38、 Road blocker size: Standard

L2000*W1000*H760,Rising height: 500 (Customized)

L2500*W1000*H760,Rising height: 500 (Customized)

L3000*W1000*H760,Rising height: 500 (Customized)

L3500*W1000*H760,Rising height: 500 (Customized)

L4000*W1000*H760,Rising height: 500 (Customized)

L4500*W1000*H760,Rising height: 500 (Customized)

L5000*W1000*H760,Rising height: 500 (Customized)

L5500*W1000*H760,Rising height: 500 (Customized)

L6000*W1000*H760,Rising height: 500 (Customized)

Rising Bollard(can add LED light, light color customized)



BLS-T6000



BLS-T6000




1、System: hydraulic system

- 2、Max passing pressure: Can pass 80-120 tons of container trucks
- 3、Voltage: AC220V 50Hz Integrated /AC380V Split
- 4、Power(w): 350W Integrated/3.75KW Split
- 5、Up time: ≤3-4S Adjustable
- 6、Down time: ≤3-4S Adjustable
- 7、Working temperature: -35°C~75°C
- 8、Storage Environment : -10°C~65°C, Water-proof
Damp-proof,Dust-proof.
- 9、Material : 304 stainless steel
- 10、Rising height: 600mm
- 11、Standard Thickness: 6 8、 10、 12、 15、 30mm (optional) .
- 12、Diameter: 168、 219、 273mm(optional)
- 13、Casing size: 430*430*1130mm/500*500*900mm
- 14、Structure : With load-bearing steel beam column, anti-collision steel beam column, 4 navigation rod
- 15、Integrated electrical mechanism : stroke 600mm,Cylinder outer diameter 60mm,Rod diameter:16mm.
- 16、6k Mirror tube
- 17、With LED (Acrylic light circle)

- 18、 Reflective sticker :2 strips
- 19、 Gang-control interface
- 20、 In case of a power outage, the bollards can be manually lowered
- 22、 IP rate: IP68
- 23、 Weight:200±KG Integrated/150±kg Split
- 24、 In rising and falling, reversible operation is available
- 25、 Device running noise≤60decibel
- 26、 Waterproof integrated hydraulic device drive
- 27、 The hydraulic cylinder is double sealed to ensure a waterproof rating
- 28、 Hydraulic drive comes with hydraulic lock
- 29、 PLC programming command control system
- 30、 220VIntegrated/380V Split power supply
- 31、 Solenoid valve voltage 24V
- 32、 Remote control distance 50M-100M (Based on the environment)
- 33、 The control box displays text adjustable (Up, Down, Action, Time control adjustment)
- 34、 Text display with Chinese and English bilingual
- 35、 PLC built-in encryption system

Tyre Killer(Electronic)

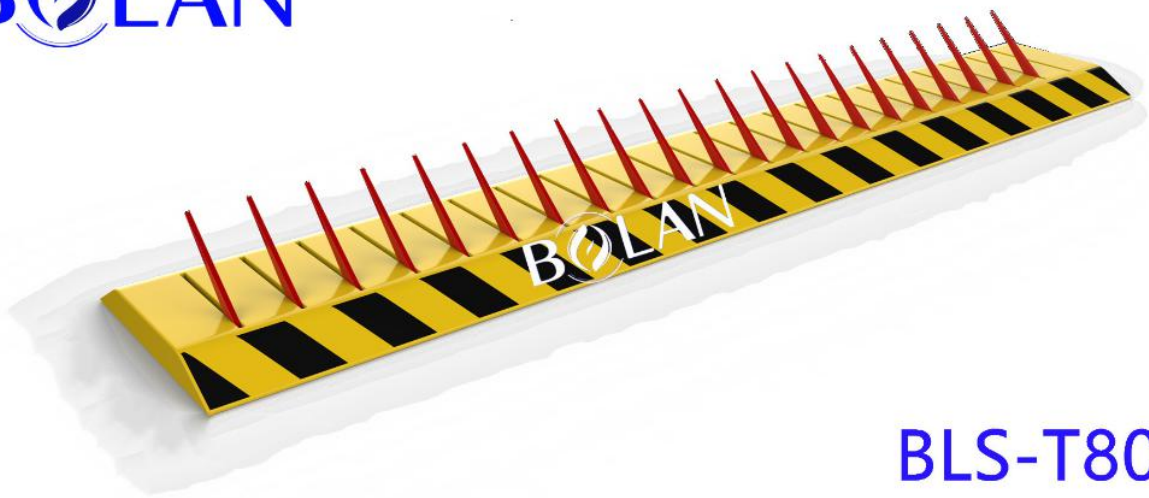

BLS-T8000

Components

- 1、 Application range:Intersection safe protection in main area
- 2、 Material: A3 Steel
- 3、 Surface treatment : Paint with reflective strip
- 4、 IP rate : IP67
- 5、 Specified color:Black and yellow
- 6、 Length: Customized

- 7、Width : 520mm
- 8、Height: 70~90mm
- 9、Max loading weight: 80T
- 10、Spike Height : 150mm
- 11、Spike Thickness: 10mm
- 12、Drive mode: Electromechanical
- 13、Working Environment : -40°C ~ +70°C
- 14、Control mode :Short range wireless remote control/drive-by-wire
- 15、Control distance $\leq 100\text{M}$
- 16、Remote control distance: within 50M
- 17、Traffic light interface
- 18、Gang control with parking barrier
- 19、Material thickness: 12mm
- 20、The whole plate forming bending, no welding

Technical Parameter

- 1、System : 220V electric drive
- 2、Passing pressure: Max 80T container truck
- 3、Power supply: 220 (Control voltage 24V)。
- 4、System dynamic power (w): 180W。

- 5、Rising time: $\leq 1-2S$
 - 6、Lowering time: $\leq 1-2S$
 - 7、Working Temperature: $-35^{\circ}C \sim 75^{\circ}C$
 - 8、Storage Environment : $-10^{\circ}C \sim 65^{\circ}C$
 - 9、Material: A3 steel,with anti-rust paint
 - 10、Color: Optional
 - 11、Weight: 0.3T
 - 12、Casing Spec:Standard casing (Size can be customized)
- L3000*W520*H70, Rising Length: 150
- L3500*W520*H70, Rising Length: 150
- L4000*W520*H70, Rising Length: 150
- L4500*W520*H70, Rising Length: 150
- L5000*W520*H70, Rising Length: 150
- L5500*W520*H70, Rising Length: 150
- L6000*W520*H70, Rising Length: 150

Tyre killer(Hydraulic)



BLS-T9000

Components

1. Application range: Intersection safe protection in main area
2. Material: A3 Steel
3. Surface treatment : Paint with reflective strip
4. IP rate : IP67
5. Specified color: Black and yellow
6. Length: Customized
7. Width : 500mm
8. Height: 70 ~ 90mm

-
9. Max loading weight: 80T
 - 10.Spike Height : 150mm
 - 11.Spike Thickness: 10mm
 - 12.Drive mode: Electromechanical
 - 13.Working Environment : -40°C ~ +70°C
 - 14.Control mode :Short range wireless remote control/drive-by-wire
 - 15.Control distance $\leq 100\text{M}$
 - 16.Remote control distance: within 50M
 - 17.Traffic light interface
 - 18.Gang control with parking barrier
 - 19.Material thickness: 12mm
 - 20.The whole plate forming bending, no welding

Technical Parameter

- 1、 System : 220V electric drive
- 2、 Passing pressure: Max 80T container truck
- 3、 Power supply: 220 (Control voltage 24V)。
- 4、 System dynamic power (w): 180W。
- 5、 Rising time: $\leq 1-2\text{S}$
- 6、 Lowering time: $\leq 1-2\text{S}$

- 7、Working Temperature: -35°C~75°C
 - 8、Storage Environment : -10°C~65°C
 - 9、Material: A3 steel,with anti-rust paint
 - 10、Color: Optional
 - 11、Weight: 0.5T
 - 12、Casing Spec:Standard casing (Size can be customized)
- L3000*W500*H120, Rising Length: 150
- L3500*W500*H120, Rising Length: 150
- L4000*W500*H120, Rising Length: 150
- L4500*W500*H120, Rising Length: 150
- L5000*W520*H120, Rising Length: 150
- L5500*W500*H120, Rising Length: 150
- L6000*W500*H120, Rising Length: 150